


**PARTS LIST**

ITEM	PART	DESCRIPTION	QTY
1	Bottom Guide	Wall Plug	1
2	Wall Plugs	Capital Wall Jamb	10
3	ST5X60 Screw	Wall Jamb Bumpers	4
4	Water Guard	ST 3.5x12 Screws	1
5	Side Pumper	ST 4x45 Screws	2
6	ST4X30 Screw	Capital Anti-Jamb	6
7	Header Connection	Roller	2
8	Header	Capital Header	1
9	Cap	Glass Panel	8
10	Bumper Block	ST 4x24 Screws	4
11	M4X16 Screw	Bottom Bumpers	4
12	Glass Panel	Capital Center Guide	2
13	Roller	Capital Curb	4
14	Anti-Jumps	Capital Wall Clip	4
15	Towel Bar	Screw Cap	2
16	ST4X14 Screw	ST 4x30 Screws	4

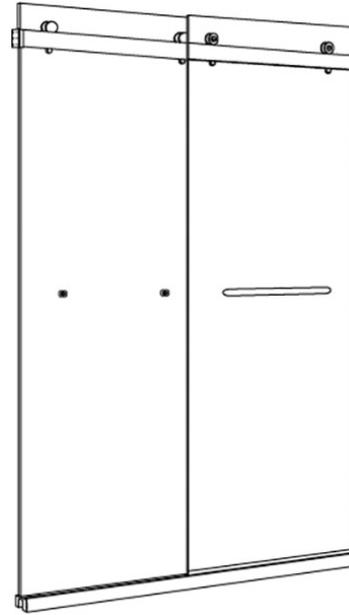

**NOTE:** Threads on rollers and anti-jumps require thread locker, sold separately. See instruction 4.


When ordering repair parts, please provide the following information:

1. Model Number
2. Part Number
3. Part Description
4. Finish Color

**Required Tools:**


To install your shower enclosure, you will need the following:

- Level
- #31 Drill Bit
- 3/16" Carbide Drill Bit (for tile walls)
- Phillips Screwdriver
- Silicone
- Hammer
- Tape Measure

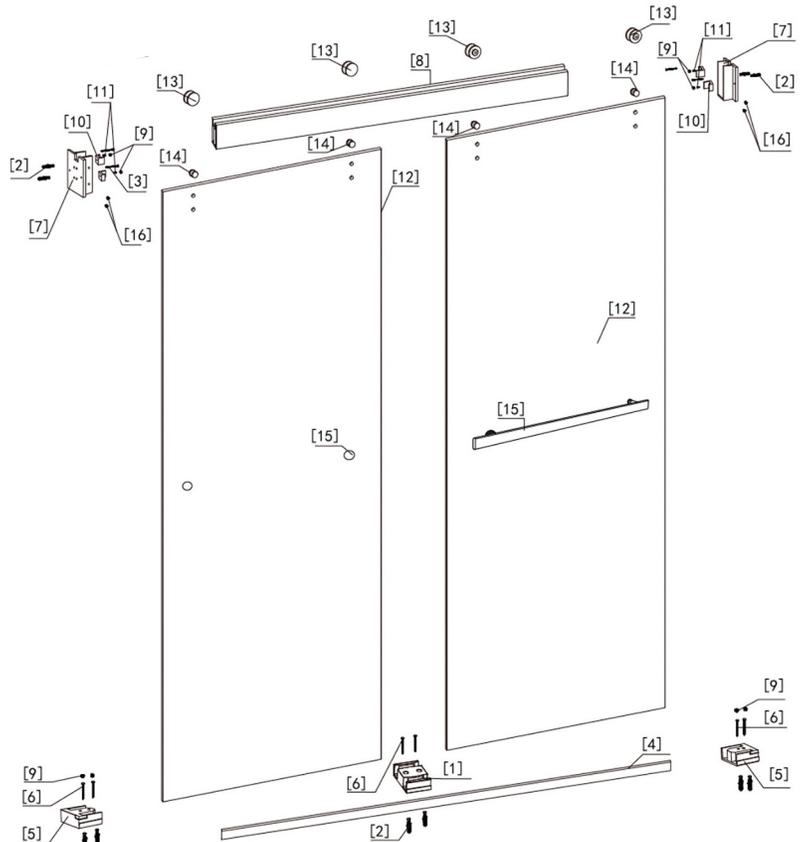

**STEP 1**


Measure and mark the position of side bumper, bottom guide and header connection as (Figure 1) .Tighten the bottom guide with inserted water guard onto shower pan. (2 option to tighten the bottom guide. One is to tear the gummed paper back of the guide and apply with silicone. The other is to drill and tighten with ST4X30x2 screws.)

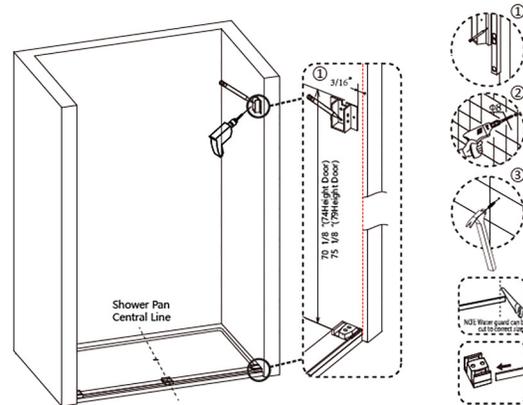

**FIGURE 1**

**STEP 2**


(See Figure 2) (1) Install the side bumper with ST4X30 screws. (2) Drill and tighten the header connection with ST5X60x2 screws. Put the header onto header connection.(3) Header can be cut to correct size.

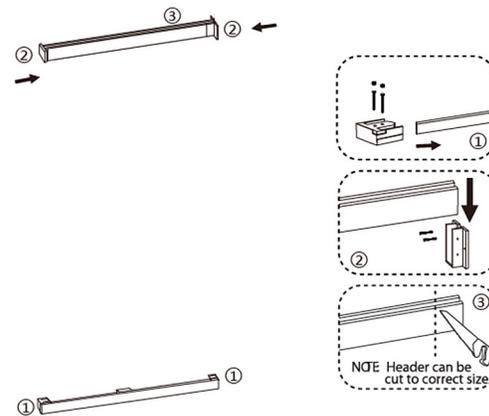

**FIGURE 2**

**STEP 3**


(See Figure 3). (1) Tighten the header and header connecton with ST4X14 screws.(2) Install the bumper block onto header connection with M4X16 screws, then put on caps..

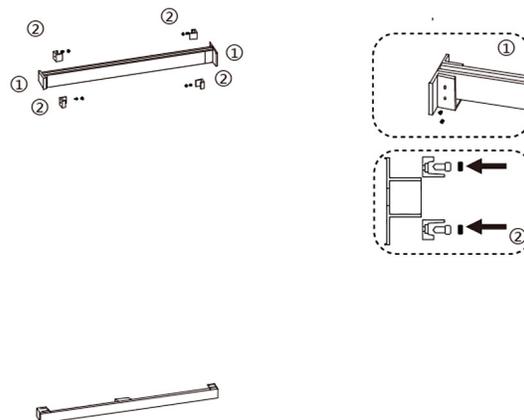

**FIGURE 3**

**STEP 4**


(See Figure 4). 4.(1) (2) (3) Assemble the roller. Hang on the door glass onto the header; install the anti jumper:available at many hardware stores and from many online retailers.

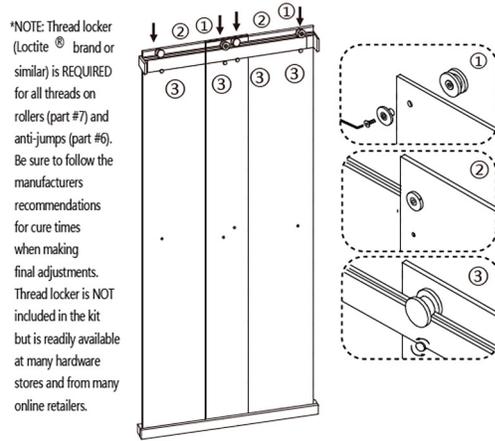

**FIGURE 4**

**STEP 5**


(See Figure 5). (1) Install the handle.(2) Adjust the roller until the door goes smoothly..

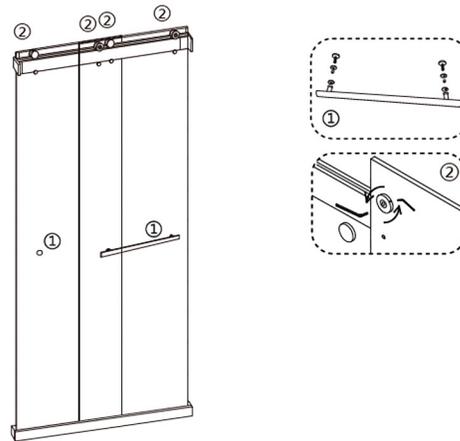

**FIGURE 5**

**STEP 6**

(See Figure 6). Apply good quality silicone sealant. Clean all joint areas as recommended.

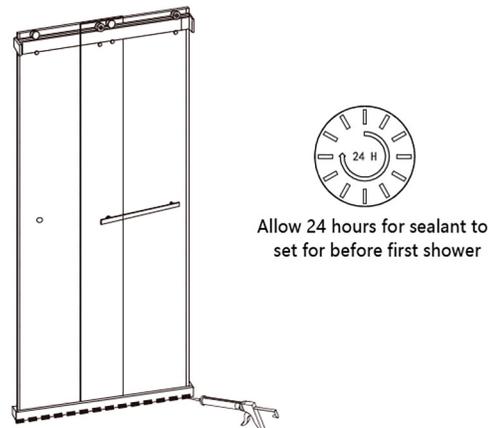

**FIGURE 6**